



CaviBlaster 2828-DOS

Diesel Engine for Off Shore Operations, 28 gpm & 2,800 psi

Specifications and Options


This powerful unit generates a super stream of high velocity cavitation for high efficient cleaning, it can strip fouling and corrosion to bare metal if desired

Accessories Included:

Feed Hose (15 feet), By-Pass Hose (15 feet),
High Pressure Hose (50 feet), Zero-Thrust Balanced Gun

Optional Accessories:

Additional pressure hose available in 50 ft or 100 ft sections
Max. Pressure hose length recommended up to 300 ft (100 meters) total

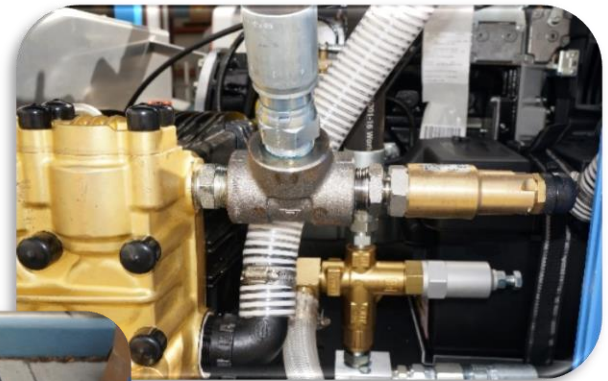

SKID Dimensions	
Length	62" / 157 cm
Width	55" / 140 cm
Height	64" / 163 cm
Weight	2,400 Lbs / 1,091 kg
Fuel Containment Pan	YES
Lifting Eyes / FL Slots	YES / YES
Certification	DNV

Pump System	
Pressure Pump	Udor VX-100/200
Pump Material / Type	Brass Positive Displacement
Flow Rate	28 gpm / 106 Lpm
Nozzle Pressure	2,800 psi / 193 Bar
Hose Diam/Max Lgth	3/4" - 300 ft / 19 mm / 100 m

Feed System	
Feed Pump	Pacer I Series
Pump Material	SS / SS Shaft
Flow Rate	170gpm/643Lpm@15Lft/3m
Transmission	Belt Driven

Drive System	
Engine	Kubota V3600
Engine Type	4-Cylinder / 4-Cycle
Cooling System	Liquid
Combustion System	Direct Injection
Exhaust	Muffler / Spark arrester
Continuous Output	63 HP / 47 kW
Clutch	Manual PTO
Starting System	Air
Emergency Shut-Off	Sentinel CPV
Emcy. Air Shut-Off	Chalwyn Valve

Tools	
Tool Type	Zero-Thrust Balanced Gun

Shipping Dimensions	
Pallet 55x62x70"	2,600 Lbs Gross weight

* Pricing and specifications subject to change without notice

CaviDyne LLC, 5077 Fruitville Rd. Suite - 109-157, Sarasota FL, 34232 USA

Phone: (352)275-5319, sales@cavidyne.com, www.cavidyne.com



CAVIBLASTER™