



CaviBlaster 2570-D

Diesel Engine, 29 gpm & 7,250 psi

Specifications and Options

This is an industrial workhorse which generates a super stream of high velocity cavitation for high efficient cleaning, it can strip fouling and corrosion to bare metal if desired

This unit is capable of achieving surface preparation stage Sa.2.5

Accessories Included:

Feed Hose (15 feet), By-Pass Hose (15 feet),
High Pressure Hose (50 feet), Zero-Thrust Balanced Gun, Battery Start

Optional Accessories:

Additional pressure hose available in 50 ft or 100 ft sections. (3/4" Diam.)
Max. Pressure hose length recommended up to 300 ft (100 meters) total




SKID Dimensions	
Height	63" / 160 cm
Width	57" / 145 cm
Length	97" / 247 cm
Weight (max w/fuel)	5,500 lbs. / 2,500 kg
Fuel/Oil Containment	Yes
Lifting Eyes / Fork Slots	Yes

Drive System	
Driver	John Deere, Tier 3
Engine Type	4-Cylinder - 4-Cycle
Cooling System	Liquid
Combustion System	Turbocharge
Air Intake	TCA
Output Max HP/kW	173 / 129 @ 2400rpm
Transmission	BELT Drive PTO
Starting System	Electric Starter
Emergency Shut-off	Electric

Feed System	
Feed Pump	Centrifugal Self-Prime
Flow Rate	80 GPM/304 L/min
Lift	20Ft / 6 m
Power transm.	Belt

Pump System	
Pressure Pump	Lemasa H-150/3 SAP
Type	Positive Displacement
Flow Rate	29 GPM / 110 L/min
Nozzle Pressure	7,200 psi / 500 Bar
Hose Diam/Max.Length	3/4" / 600 Lft - 19 mm / 200 m

Tool Options	
ZT Balanced Dump-Gun	

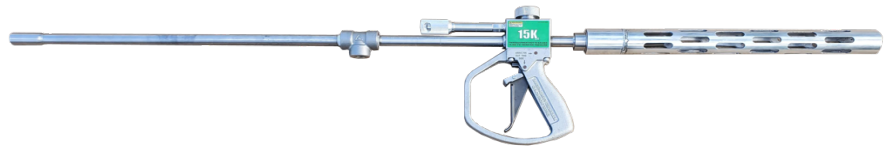

Shipping Dimensions	
Pallet 58x98x70"	6,000 Lbs Gross weight

* Pricing and specifications subject to change without notice

CaviDyne LLC, 5077 Fruitville Rd. Suite - 109-157, Sarasota FL, 34232 USA

Phone: (352)275-5319, sales@cavidyne.com, www.cavidyne.com